CONFIGURATION:

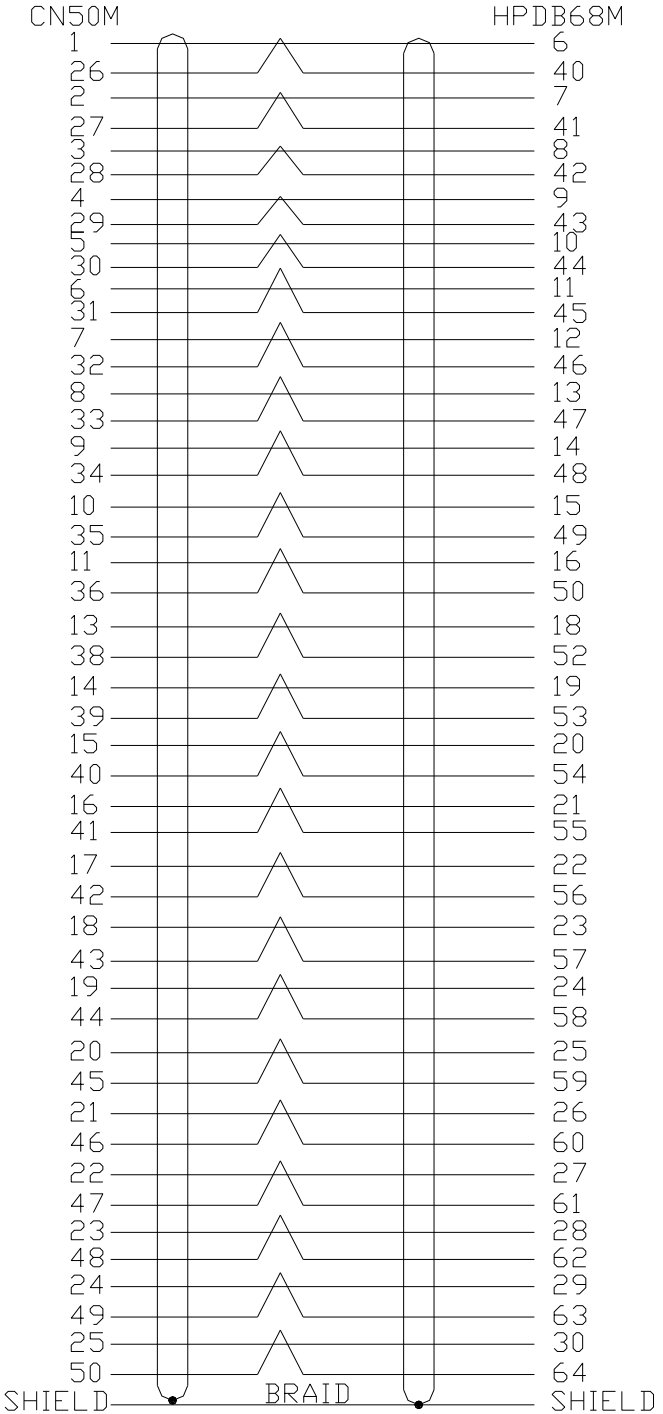

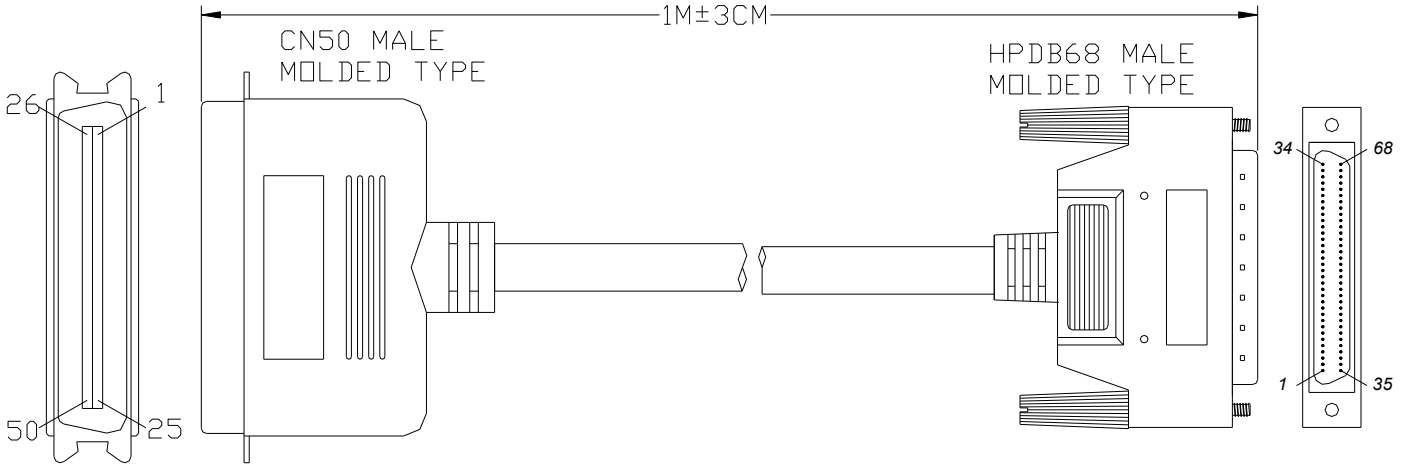

MAT'L:

1.CABLE:UL2990 #28 25PAIRS+1+AL/MY+BRAID
(BEIGE PVC JACKET) O.D:8.0MM
INSULATION OF CONDUCTOR O.D:Ø0.62MM

2.CONNECTORS:
HPDB68M WITH PIN TYPE AND I.D.C TYPE CN50M WITH SOLDER TYPE
BOTH CONNECTORS INSULATOR COLOR WITH BLACK

3.THUMBSCREW:#2-56UNC TYPE

4.BOTH CONNECTORS OVERALL MOLDED WITH BEIGE PVC
INNER MOLDED WITH COPPER TAPE AND SOLDER(360±)
COPPER TAPE SIZE: HP68M:(125MM X 10MM)+(110MM X 30MM)
CN50M:42MM X 140MM

NOTE:

1.TOTAL LENGTH:1M±3CM
2.COLOR:BEIGE
3.MOLDED TYPE
4.PACKING:TOP HANGER[S]+STICKER,50PCS/CTN





File no 500-89		Date 06 OCT, 2001		Scale 1/1	Unit mm	Rev. V2.0	Drawing
Dwg.no 500-89		Buyer SBG		TITLE: CN50 MALE/HPDB68 MALE MD-TYPE			
Drawn by	Checked by	Approve by	Buyer CFM.				
³\¤p¸`				(ªF²ð) ¦w ¹F ¹q ¤l ¼t ON-TECH ELECTRONIC FACTORY(CHINA)			